


m o o o i

Random Floor Lamp II

BERTJAN POT

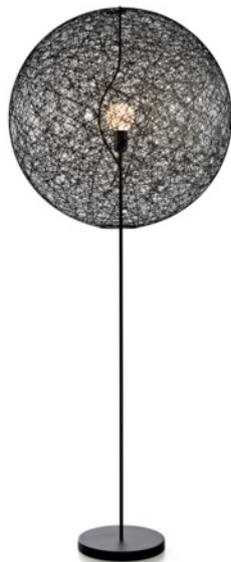

A floor lamp is one of the most versatile lighting solutions to have in your home. Especially one that diffuses light in all directions, lighting up every dark corner. The Random Floor Lamp II holds the same simplicity and lightness as the rest of its family members. Beautifully transparent and 'light'.

Detailing



Because of how they're made, every Random Light is unique and never completely round.

Colours


Black

White

Random Floor Lamp II / Medium Ball

Dimensions

Ø80cm | 31.5"



Product

WIDTH 80cm | 31.5"

HEIGHT 80cm | 31.5"

DEPTH 80cm | 31.5"

DIAMETER 80cm | 31.5"

WEIGHT NETTO 0.1kg | 0.22lbs

Packaging

WIDTH 87cm | 34.3"

HEIGHT 88cm | 34.6"

CUBAGE 0.67m³ | 23.52ft³

LENGTH 87cm | 34.3"

WEIGHT 7kg | 15.43lbs

Technical

MATERIAL

Sphere from fiberglass with epoxy resin, powder coated steel base

Random Floor Lamp II / Medium Base

Dimensions

Ø80cm | 31.5"



Ø202cm | 79.5"

Product

WIDTH 80cm | 31.5"

HEIGHT 202cm | 79.5"

DEPTH 80cm | 31.5"

DIAMETER 80cm | 31.5"

WEIGHT NETTO 6.7kg | 14.77lbs

Technical CE

MATERIAL

Sphere from fiberglass with epoxy resin, powder coated steel base

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE

Incandescent

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

1

DIAMETER SHADE

80cm | 31.5"

INPUT VOLTAGE

220-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

E27

RECOMMENDED LIGHTSOURCE

25W MAX type C, 10W LED light included

LIFETIME

50000 hours

CABLE COLOUR

Black

PLUG TYPE

Europlug (Type-C)

CABLE LENGTH

300cm | 118.1"

SWITCH

In line slide dimmer with on/off switch

COLOUR TEMPERATUE

2700 K

CRI

90

LIGHT DIRECTION

All directions

LIGHT OUTPUT

800 lm

EEI

0.39

EFFICIENCY

32 lm/W

*Technical cULus***MATERIAL**

Sphere from fiberglass with epoxy resin, powder coated steel base

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE

Incandescent

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

1

DIAMETER SHADE

80cm | 31.5"

INPUT VOLTAGE

100-120

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

E26

RECOMMENDED LIGHTSOURCE

25W MAX type C, 10W LED light included

LIFETIME

50000 hours

CABLE COLOUR

Black

PLUG TYPE

US plug (Type A)

CABLE LENGTH

300cm | 118.1"

COLOUR TEMPERATURE

2700 K

LIGHT DIRECTION

All directions

EEI

0.39

SWITCH

In line slide dimmer with on/off switch

CRI

90

LIGHT OUTPUT

800 lm

EFFICIENCY

32 lm/W

Random Floor Lamp II / Small Ball

Dimensions

Ø50cm | 19.7"



Product

WIDTH 50cm | 19.7"**HEIGHT** 50cm | 19.7"**DEPTH** 50cm | 19.7"**DIAMETER** 50cm | 19.7"**WEIGHT NETTO** 0.1kg | 0.22lbs

Packaging

WIDTH 51cm | 20.1"**HEIGHT** 53cm | 20.9"**CUBAGE** 0.14m³ | 4.87ft³**LENGTH** 51cm | 20.1"**WEIGHT** 2kg | 4.4lbs

Technical

MATERIAL

Sphere from fiberglass with epoxy resin, powder coated steel base

Random Floor Lamp II / Small Base

Dimensions

Ø50cm | 19.7"



Ø187cm | 73.6"

Product

WIDTH 50cm | 19.7"

HEIGHT 187cm | 73.6"

DEPTH 50cm | 19.7"

DIAMETER 50cm | 19.7"

WEIGHT NETTO 6.4kg | 14.11lbs

Packaging

WIDTH 42cm | 16.5"

HEIGHT 197cm | 77.6"

CUBAGE 0.35m³ | 12.27ft³

LENGTH 42cm | 16.5"

WEIGHT 9.5kg | 20.94lbs

Technical CE

MATERIAL

Sphere from fiberglass with epoxy resin, powder coated steel base

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE

Incandescent

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

1

DIAMETER SHADE

50cm | 19.7"

INPUT VOLTAGE

220-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

E27

RECOMMENDED LIGHTSOURCE

25W MAX type G, 10W LED light included

LIFETIME

50000 hours

CABLE COLOUR

Black

PLUG TYPE

Europlug (Type-C)

CABLE LENGTH

300cm | 118.1"

SWITCH

In line slide dimmer with on/off switch

COLOUR TEMPERATURE

2700 K

CRI

90

LIGHT DIRECTION

All directions

LIGHT OUTPUT

800 lm

EEl
0.39

EFFICIENCY
32 lm/W

Technical cULus

MATERIAL

Sphere from fiberglass with epoxy resin, powder coated steel base

ENERGY LABEL

A++ to E

LIGHTSOURCE TYPE

Incandescent

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

1

DIAMETER SHADE

50cm | 19.7"

INPUT VOLTAGE

100-120

FREQUENCY

50/60

MAX POWER CONSUMPTION

25W

DIMMABLE

Yes

LAMPHOLDER

E26

RECOMMENDED LIGHTSOURCE

25W MAX type C, 10W LED light included

LIFETIME

50000 hours

CABLE COLOUR

Black

PLUG TYPE

US plug (Type A)

CABLE LENGTH

300cm | 118.1"

SWITCH

In line slide dimmer with on/off switch

COLOUR TEMPERATUE

2700 K

CRI

90

LIGHT DIRECTION

All directions

LIGHT OUTPUT

800 lm

EEl

0.39

EFFICIENCY

32 lm/W

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

DIMMER TYPE

Dimmer on power cord

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.
