

m o o o i

# Statistocrat Floor Lamp

ATELIER VAN LIESHOUT



The floor lamp's lean aluminium body is really multifunctional with its towering two meters and all-embracing light beams, the tallest shade projecting light towards the ceiling while the wider shade acts as the perfect reading lamp. And what about the two other shades? The lowest is no shade ... but a surprisingly useful side table. Perfect to support a laptop or your favorite drink, it's always in the spotlight!

## *Detailing*



Statistocrat features Joep van Lieshout's signature raw weld finish.

## *Colours*




RAL 1004  
Golden yellow



RAL 1013  
Oyster white




RAL 1023  
Traffic yellow



RAL 1027  
Curry



RAL 2000  
Yellow orange



RAL 2002  
Vermilion



RAL 2004  
Pure orange



RAL 3003  
Ruby red




RAL 3012  
Beige red



RAL 5003  
Sapphire blue



RAL 5008  
Grey blue



RAL 6010  
Grass green



RAL 6021  
Pale green




RAL 7001  
Silver grey



RAL 7011  
Iron grey



RAL 7035  
Light grey



RAL 7044  
Silk grey



RAL 8001  
Ochre brown



RAL 8014  
Sepia brown



RAL 8016  
Mahogany brown




RAL 9005  
Jet black




RAL 9010  
Pure white



RAL 9016  
Traffic white




RAL 3015  
Light pink



RAL 5024  
Pastel blue

# Statistocrat Floor Lamp

## Dimensions

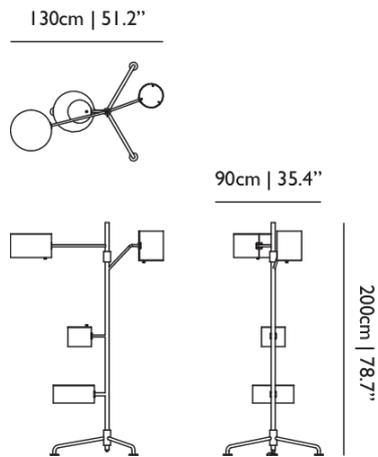

## Product

**WIDTH** 130cm | 51.2"  
**HEIGHT** 200cm | 78.7"  
**DEPTH** 90cm | 35.4"  
**WEIGHT NETTO** 23kg | 50.71lbs

## Packaging

**WIDTH** 121cm | 47.6"  
**HEIGHT** 215cm | 84.6"  
**CUBAGE** 3.15m<sup>3</sup> | 111.16ft<sup>3</sup>  
**LENGTH** 121cm | 47.6"  
**WEIGHT** 81kg | 178.57lbs

## Technical CE

### MATERIAL

Aluminium frame with structured matt powdercoating.

### ENERGY LABEL

Energy Label B

### LIGHTSOURCE INCLUDED

Yes

### INPUT VOLTAGE

180-240

### MAX POWER CONSUMPTION

40W

### LAMPHOLDER

LED (Solid state)

### CABLE COLOUR

Black

### CABLE LENGTH

300cm | 118.1"

### COLOUR TEMPERATURE

2700 K

### LIGHT DIRECTION

All directions

### LIGHTSOURCE TYPE

LED

### NUMBER OF LIGHTSOURCES

3

### FREQUENCY

50/60

### DIMMABLE

Yes

### LIFETIME

50000 hours

### PLUG TYPE

Europlug (Type-C)

### SWITCH

In line on/off switch

### CRI

80

### LIGHT OUTPUT

1200 lm

## Technical CU

**MATERIAL**

Aluminium frame with structured matt powdercoating.

**ENERGY LABEL**

Energy Label B

**LIGHTSOURCE INCLUDED**

Yes

**INPUT VOLTAGE**

90-130

**MAX POWER CONSUMPTION**

40W

**LAMPHOLDER**

LED (Solid state)

**CABLE COLOUR**

Black

**CABLE LENGTH**

300cm | 118.1"

**COLOUR TEMPERATURE**

2700 K

**LIGHT DIRECTION**

All directions

**LIGHTSOURCE TYPE**

LED

**NUMBER OF LIGHTSOURCES**

3

**FREQUENCY**

50/60

**DIMMABLE**

Yes

**LIFETIME**

50000 hours

**PLUG TYPE**

US plug (Type A)

**SWITCH**

In line on/off switch

**CRI**

80

**LIGHT OUTPUT**

1200 lm

---

## *Dimmer*

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

**DIMMER TYPE**

Integrated dimmer

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

---