


# SAHCO

1831

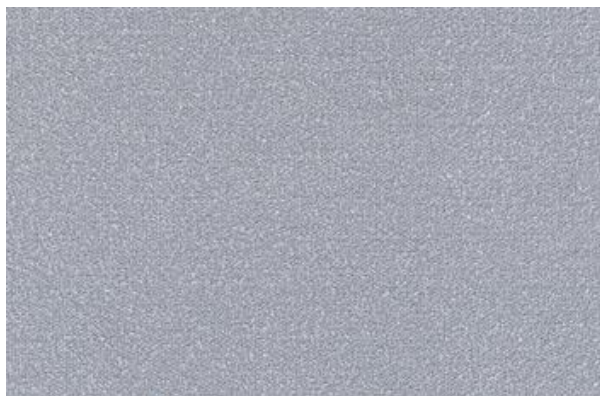

## Acca

Type: Upholstery

Composition: 25% recycled polyester, 35% viscose, 33% recycled cotton, 7% recycled polyacrylic

Yarn type: Staple, Filament

Binding: Jacquard

Width: Approx. 140 cm, 55 inches

Weight: Approx. 800 g/lin.m, 25.8 oz/ly

Repeat: None

Colour differences may occur.

Cleaning: Vacuum clean frequently, ideally every week.

Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.

Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.

Disinfection, see [www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)



10<sup>year</sup>  
warranty



## Abrasion

Approx. 50.000 Martindale rubs, EN ISO 12947

*Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.*

## Pilling

Note 3, EN ISO 12945

## Seam slippage

Seam parallel to warp: 4.0 mm

parallel to weft: 3.0 mm

EN ISO 13 936-2 180 Newton

## Lightfastness

Note 5-6 ISO 105-B02

## Fastness to rubbing.

Dry note 4-5 ISO 105-X12

Wet note 3-5 ISO 105-X12

## Flame resistance

BS 5852 Crib 5 with treatment \*

BS 5852 part 1 with treatment \*

EN 1021-1/2

US Cal. Bull. 117-2013

Free from added flame retardant chemicals as standard.

*\* To pass this test flame retardant treatment is necessary.*

*We are looking into more environmentally friendly alternatives but for now, the external finisher may use a treatment containing halogen-based flame retardants.*

# SAHCO

1831

## **ACT Guidelines Woven fabrics.**

### **Flammability**

US Cal. Bull. 117-2013

### **Dry & Wet Crocking AATCC 8**

Dry Crocking: Grade 5.0

Wet Crocking: Grade 3.0-5.0

### **Colour Fastness to Light AATCC 16**

Grade 4.0-5.0 minimum 40 hours

### **Physical properties**

Pilling ASTM D3511 Class 3

Breaking Strength ASTM D5034 warp 312 / weft 97 lbs

Seam Slippage ASTM D4034 warp 158,0 / weft 43,5 lbs

### **Abrasion ASTM D4966**

50.000 cycles Martindale – High Traffic

## **Environmental benefits**

Recycled content

REACH compliant

Californian Proposition 65 list compliant

LBC Red list compliant

## **Green building certificates**

Greenguard Gold: Low chemical emission

Environmental Product Declaration (EPD): Based on a LCA following EN 15804 and follow the standard of ISO 14040

Health Product Declaration (HPD): Declaring textile content and substance

## **Country of origin**

Italy

## **Launch**

2023

## **Warranty**

10 years. See terms and conditions on kvadrat.dk

Kvadrat packaging and cardboard is recyclable. Cardboard material is FSC certified and / or contains recycled content.

For further information

[www.kvadrat.dk/en/sahco](http://www.kvadrat.dk/en/sahco)